

Delighting You Always

SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS

CANON SINGAPORE PTE. LTD.

1 HarbourFront Avenue, #04-01 Keppel Bay Tower, Singapore 098632 Tel: 65-6799-8888 Fax: 65-6799-8882

www.canon-asia.com

CANON OFFICES

HONG KONG

Canon Hongkong Co., Ltd. Tel: 852-3191-2388 Fax: 852-2369-3800 www.canon.com.hk

INDIA

Canon India Pvt. Ltd. Tel: 91-124-4160-000 Fax: 91-124-4160-011 www.canon.co.in

MALAYSIA

Canon Marketing (Malaysia) Sdn. Bhd. Tel: 603-7844-6000

Fax: 603-7845-0505 www.canon.com.my

PHILIPPINES

Canon Marketing (Philippines), Inc. Tel: 632-884-9000 Fax: 632-894-4174 www.canon.com.ph

SINGAPORE

Canon Singapore Pte. Ltd. Tel: 65-6799-8888 Fax: 65-6799-8882 www.canon.com.sg

THAILAND

Canon Marketing (Thailand) Co., Ltd. Tel: 66-2-3449-999

Fax: 66-2-3449-967/68 www.canon.co.th

VIETNAM

Canon Marketing Vietnam Co., Ltd. Ho Chi Minh City, Vietnam Tel: 84-8-38200-466 Fax: 84-8-38200-477 www.canon.com.vn

CANON BUSINESS PARTNERS

BANGLADESH

J.A.N. Associates Tel: 880-2-8611-444 Fax: 880-2-8610-410

BRUNEI

Interhouse Company Tel: 673-2-6530-01 Fax: 673-2-6530-03

CAMBODIA

i-Qlick (Cambodia) Pte. Ltd. Tel: 855-23-9966-38 Fax: 855-23-9966-39

INDONESIA PT Dataseria

P.T. Datascrip Tel: 62-21-2664-8999 Fax: 62-21-6544-811/13

MALDIVES

SIMDI Company (Pvt) Ltd. Tel: 960-3334-421 Fax: 960-3334-424

MYANMAR

Myanmar Golden Rock International Co. Ltd. Tel: 95-1-2020-92/3/4 Fax: 95-1-2020-79

NEPAL

International Electronics Concern (P) Ltd. Tel: 977-1-4421-991

Fax: 977-1-4421-909

PAKISTAN

MBM International Tel: 9221-3227-0933 Fax: 9221-3438-6308

SRI LANKA

Metropolitan Computers (Pvt) Ltd. Tel: 94-11-2437-797

Fax: 94-11-2448-980


DEALER'S STAMP

0172W040 © 2012 Canon Singapore Pte. Ltd. All rights reserved.

This document is for information purpose only and the contents are subject to change without notice. Product options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations with respect to this document.

imageCLASS LBP7100(n & LBP7110(w



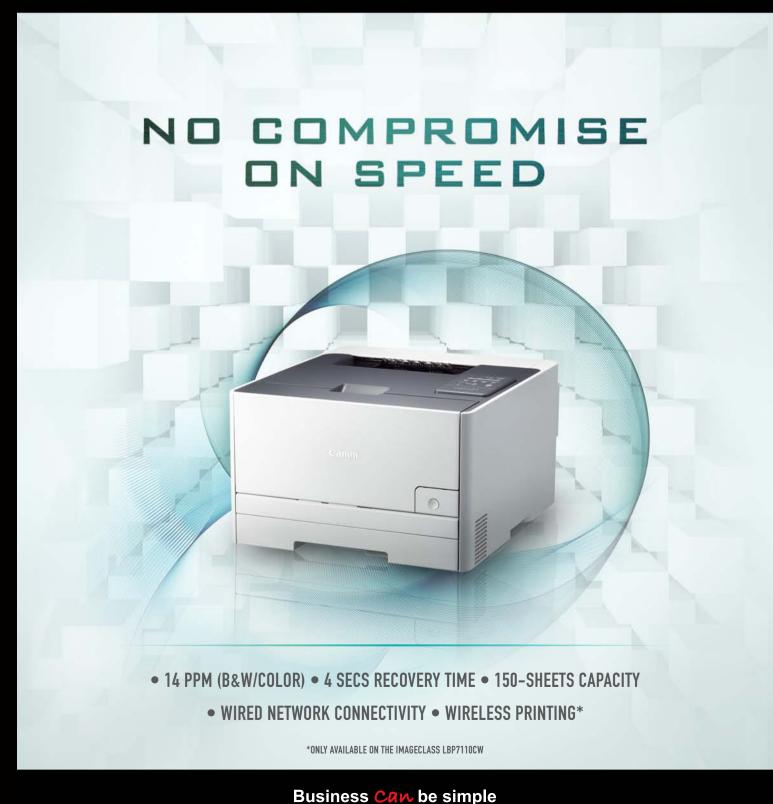

imageCLASS LBP7110(w

PRINT FASTER IN COLOR AND BLACK & WHITE

The new Canon imageCLASS LBP7100Cn and LBP7110Cw will boost your productivity at home or in the office with a suite of impressive features. Expect fast color printing and seamless network connectivity, affording flexible device installation and placement. The LBP7110Cw also features Wi-Fi connectivity, and supports the WPS Push Button Configuration for hassle-free integration into secured wireless networks. For reliable and quality color printing, you can count on the LBP7100Cn and LBP7110Cw.

FAST PRINTING

The imageCLASS LBP7100Cn and LBP7110Cw produce monochrome and color documents at up-to 14ppm (A4), at up-to 1200 x 1200 dpi (equivalent). Canon's superior processing architecture ensures that graphics and photo images retain superb color accuracy and gradation, while text on documents turn out sharp and crisp.

FAST DOCUMENT PROCESSING

Canon UFR II LT is a next-generation print language that incorporates Load Balancing Technology to distribute



processing resources between host PC and printer for faster printing. The result is significantly faster processing, without the need to install additional memory upgrades.

WIRELESS & WIRED CONNECTIVITY

Ethernet

Connect the LBP7100Cn or LBP7110Cw to a wired LAN environment and share your printing resources with multiple users. The LBP7110Cw also supports Wi-Fi and Wi-Fi Protected Setup (WPS) push-button configuration.

SIMPLE OPERATION & EASY MAINTENANCE

The All-In-One Toner Cartridge 331 incorporates the photosensitive drum, toner reservoir, and waste toner container into one compact unit, simplifying toner replacements.

FAST WARM-UP AND RECOVERY TIMES

Canon's On-Demand Fixing technology reduces warm-up and recovery times dramatically. The LBP7100Cn and LBP7110Cw take just 4 seconds to enter Ready mode even after long periods of inactivity, and consume just 0.9W of power in Sleep mode.

CANON S-TONER

Canon S-Toner produces vivid, accurate color for truly impressive documents and images. The polymerized toner particles have a wax core, are spherical



imageCLASS

Cartridge 331

in shape and uniform in size. This facilitates a smoother transfer from the fixing roller, ensuring exceptional detail and consistently high-quality color output.

SPECIFICATIONS

imageCLASS LBP7100(n

imageCLASS

Printing Method	Color Laser Beam Printing
Fixing Method	On-Demand Fixing
Printing Speed	Mono: 14ppm (A4 / Letter) Color: 14ppm (A4 / Letter)
Print Resolution	600 x 600dpi 9600 (equivalent) x 600dpi 1200 x 1200dpi (equivalent)
First Printout Time (FPOT)	18/18 secs (A4/Letter)
Warm-Up Time (From Power On)	20 secs or less
Recovery Time (From Sleep Mode)	Approx. 4 secs
Page Description Language	UFR II LT
Paper Input (Based on 80g/m²)	150 sheets
Paper Output (Based on 80g/m²)	125 sheets (Face-Down)
Paper Size	A4 / B5 / A5 / Letter / Legal / Executive / 16K / Foolscap / Statement / Envelope COM-10 / Envelope Monarch / Envelope C5 / Envelope DL / 3x5 index card / Custom (Width: 83-215.9mm x Length: 127.0-355.6mm)
Paper Weight	60-220g/m²
Print Margins	5 mm-top, bottom, left and right (Envelope: 10mm)
Standard Interface (Wired)	USB 2.0 High-Speed 10Base-T ∕ 100Base-TX
Standard Interfaces (Wireless)	(Infrastructure Mode, WPS Easy Setup)
Compatible Operating Systems	Windows XP (32bit/64bit) / Windows Server 2003 (32bit/64bit) / Windows Vista (32bit/64bit) / Windows Server 2008 (32bit/64bit) / Windows Server 2008 R2 (64bit) / Windows 7 (32bit/64bit) / Mac OS 10.5.x -*1 / Linux (32bit/64bit)*2, Citrix
Operation Panel	3 Keys, 11 LEDs 4 Keys, 12 LEDs
Device Memory	64MB
Noise Level*3	During Operation: 6.52B or less (Sound Power) Approx. 49dB (Sound Pressure) During Standby: Inaudible (Sound Power)*4 Inaudible (Sound Pressure)*4
Power Consumption	Maximum: 800W or less
	During Operation: Approx. 340W
	During Standby: Approx. 10W
	During Sleep: Approx. 0.9W During Sleep: Approx. 0.9W / 4W (wireless)
Energy Star TEC (Typical Electricity Consumption)	0.4kWh/week
Dimensions (W×D×H)	406 x 454 x 255mm (Excluding protrusion)
Weight	Approx. 16.6kg (Without Cartridge)
Power Requirement	220-240V (±10%), 50/60Hz (±2Hz)
Operating Environment	Temperature: 10-30°C Humidity: 20-80%RH (No Condensation)
Toner Cartridge*5	Cartridge 331 Black: 1,400 pages (Bundled Cartridge: 800 pages)
	Cartridge 331 II Black: 2,400 pages Cartridge 331 CMY: 1,500 pages (Bundled Cartridge: 800 pages)

- *1 The latest drivers for Mac OS can be downloaded from www.canon-asia.com when available
- *2 The latest drivers for Linux can be downloaded from www.canon-asia.com when available
- *3 Tested in accordance to ISO7779 and declared per ISO9296
- *4 "Inaudible" means each sound pressure level at bystander's position is less than the absolute criterion value (about background noise) of ISO 7779
- *5 Toner catridge yield in accordance with ISO/IEC 19798
- *6 Monthly Duty Cycle value provides a means for comparison of product robustness in relation to other Canon Laser Devices, and does not refer to actual maximum image output per month